UNOFFICIAL DOCUMENT

DESCRIPTION OF STATE TRUST LAND SURVEYED

THE EAST HALF OF SECTION 22, TOWNSHIP 36 NORTH, RANGE 8 EAST OF THE WILLAMETTE MERIDIAN, SKAGIT COUNTY

PER CLEAR LIST NO. 2 APPROVED 1-11-1895, RECORDED IN VOLUME 235, PAGES 6-8 OF THE OFFICIAL RECORDS OF JEFFERSON COUNTY

AND

THE NORTH HALF OF THE SOUTHWEST QUARTER AND THE SOUTHWEST QUARTER OF THE SOUTHWEST QUARTER OF SECTION 22, TOWNSHIP 36 NORTH, RANGE 8 EAST OF THE WILLAMETTE MERIDIAN, SKAGIT COUNTY

PER CLEAR LIST NO. 8 APPROVED 4-21-1896, RECORDED IN VOLUME 696, PAGES 444-449 OF THE OFFICIAL RECORDS OF JEFFERSON COUNTY

AND

THE SOUTHEAST QUARTER OF THE SOUTHWEST QUARTER OF SECTION 22, TOWNSHIP 36 NORTH, RANGE 8 EAST OF THE WILLAMETTE MERIDIAN, SKAGIT COUNTY

PER STATUTORY WARRANTY DEED RECORDED UNDER SKAGIT COUNTY AUDITOR'S NUMBER 201303180234 AND DATED 3-18-2013

BASIS OF BEARINGS

WASHINGTON COORDINATE SYSTEM, NAD83(2011)(EPOCH 2010), NORTH ZONE, DERIVED FROM AVERAGED STATIC GPS SESSIONS WITH OPUS POST PROCESSING

CONVERGENCE:

-0° 41' 08" AT CORNER N15

AVERAGE PROJECT DISTANCE FACTOR:

THE AREAS AND DISTANCES SHOWN ARE GRID. DIVIDE THE GRID DISTANCE BY 0.99992253 TO COMPUTE GROUND DISTANCE.

LATITUDE FACTOR = 0.99997686
ELEVATION FACTOR = 0.99994567
COMBINED GRID FACTOR = 0.99992253

METHOD OF HORIZONTAL CONTROL

WE ESTABLISHED PRIMARY CONTROL FOR THIS SURVEY WITH RTK SURVEYING, PERFORMED WITH LEICA GS16 RECEIVERS, USING BASE STATIONS ESTABLISHED BY MULTIPLE STATIC GPS SESSIONS PROCESSED WITH OPUS POST PROCESSING. CORNER TIES WERE MADE BY FIELD TRAVERSE USING A LEICA TS16 TOTAL STATION. TRAVERSES WERE EITHER CLOSED LOOPS OR BEGAN AND ENDED ON GPS BASELINES. CLOSURES MEET RELATIVE ACCURACY STANDARDS AS SPECIFIED IN WAC 332_130_085.

NARRATIVE

THE PURPOSE OF THIS SURVEY IS TO POST PORTIONS OF STATE TRUST LANDS IN SECTION 22 AS SHOWN

THIS SURVEY DOES NOT PURPORT TO SHOW ALL EASEMENTS OF RECORD OR OTHERWISE.

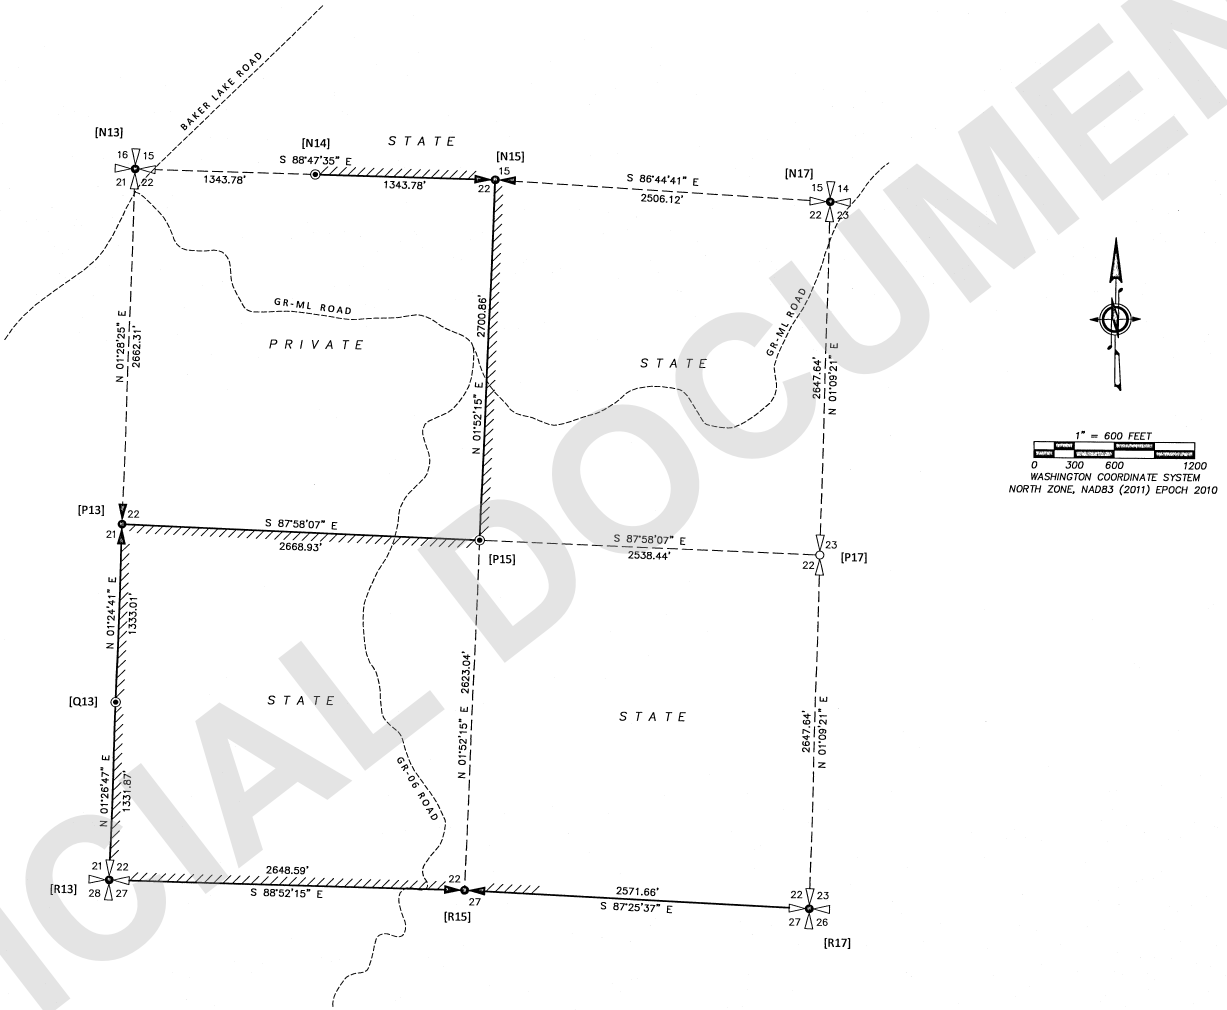

1" = 600 FEET
0 300 600 1200
WASHINGTON COORDINATE SYSTEM
NORTH ZONE, NAD83 (2011) EPOCH 2010

LEGEND

- SET DNR MONUMENT
- FOUND MONUMENT
- CALCULATED

LINE POSTING:

////////// - INDICATES THAT 6' WHITE CARSONITE "BOUNDARY" POSTS WERE SET AT IRREGULAR INTERVALS OF LESS THAN 300 FEET, ALONG THE INDICATED SUBDIVISION LINE AND ARE WITHIN ONE FOOT OF THE ACTUAL SUBDIVISION LINE.

SECTION 22, TOWNSHIP 36 NORTH, RANGE 8 EAST

NE 1/4 NE 1/4; NW 1/4 NE 1/4; SW 1/4 NE 1/4; SE 1/4 NE 1/4; NE 1/4 SW 1/4; NW 1/4 SW 1/4; SW 1/4 SW 1/4; SE 1/4 SW 1/4; NE 1/4 SE 1/4; NW 1/4 SE 1/4; SW 1/4 SE 1/4; SE 1/4 SE 1/4;

AUDITOR'S INDEXING DATA

T. 36 N., R. 8 E.

AUDITOR'S INDEXING DIAGRAM

AUDITOR'S CERTIFICATE

FILED FOR RECORD THIS 30 DAY OF June, 2022
AT 11:02A M. UNDER AUDITOR'S FILE # 202206300049
AT THE REQUEST OF THE WASHINGTON STATE DEPARTMENT OF NATURAL RESOURCES

Sandra Perkins
SKAGIT COUNTY AUDITOR

Judy Bowman
DEPUTY AUDITOR

SURVEYOR'S CERTIFICATE

THIS MAP CORRECTLY REPRESENTS A SURVEY MADE BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE REQUIREMENTS OF THE SURVEY RECORDING ACT AT THE REQUEST OF THE WASHINGTON STATE DEPARTMENT OF NATURAL RESOURCES IN APRIL, 2022.

6-27-2022

BRIAN J. WILLIAMS, P.L.S.

47613
CERTIFICATE NUMBER

BRIAN JAMES WILLIAMS
STATE OF WASHINGTON
47613
REGISTERED
PROFESSIONAL LAND SURVEYOR
6-27-22

A SURVEY IN SECTION 22,
TOWNSHIP 36 NORTH, RANGE 8 EAST, W.M.,
SKAGIT COUNTY

STATE OF WASHINGTON
DEPARTMENT OF NATURAL RESOURCES

LAND SURVEY SECTION - P.O. BOX 47030
OLYMPIA, WASHINGTON 98504-7030 (360) 902-1206

"FANGORN" SURVEY

FIELD CREW: B. WILLIAMS, P.L.S.
B. SIVRET
R. THOMAS, L.S.I.T.

FIELD BOOK: 7137 & 7137A 5/5/2022

FINAL MAP NUMBER: 2230

SHEET 1 OF 2

202206300049
05/30/2022 10:02 AM Pages: 1 of 2 Fees: $252.50
Skagit County Auditor

202206300049
06/30/2022 11:02 AM Page 2 of 2

LIST OF PERTINENT SURVEY DOCUMENTS USED FOR REFERENCE

RECORDING INFORMATION REFERS TO THE RECORDS OF THE SKAGIT COUNTY AUDITOR

(1) GENERAL LAND OFFICE SURVEY BY U.S. DEPUTY SURVEYOR ISAAC M. GALBRAITH, UNDER HIS CONTRACT NUMBER 369, DATED 5-25-1891

(2) SCOTT PAPER COMPANY CORNER RECORD FOR CORNER N15, ON FILE WITH THE DNR PUBLIC LAND SURVEY OFFICE IN OLYMPIA AND DATED 11-10-1944

(3) DNR SECTION CORNER SHEETS FOR SECTIONS 22 AND 23, ON FILE WITH THE DNR PUBLIC LAND SURVEY OFFICE IN OLYMPIA, PERTINENT DATE OF 12-3-1952

(4) SCOTT PAPER COMPANY CORNER RECORD FOR CORNER R15, ON FILE WITH THE DNR PUBLIC LAND SURVEY OFFICE IN OLYMPIA AND DATED 5-27-1964

(5) SCOTT PAPER COMPANY CORNER RECORD FOR CORNER N13, ON FILE WITH THE DNR PUBLIC LAND SURVEY OFFICE IN OLYMPIA AND DATED 12-28-1965

(6) SCOTT PAPER COMPANY CORNER RECORD FOR CORNER N15, ON FILE WITH THE DNR PUBLIC LAND SURVEY OFFICE IN OLYMPIA AND DATED 12-28-1965

(7) SCOTT PAPER COMPANY CORNER RECORD FOR CORNER P13, ON FILE WITH THE DNR PUBLIC LAND SURVEY OFFICE IN OLYMPIA AND DATED 5-21-1968

(8) SCOTT PAPER COMPANY CORNER RECORD FOR CORNER R13, ON FILE WITH THE DNR PUBLIC LAND SURVEY OFFICE IN OLYMPIA AND DATED 5-21-1968

(9) SCOTT PAPER COMPANY CORNER RECORD FOR CORNER P15, ON FILE WITH THE DNR PUBLIC LAND SURVEY OFFICE IN OLYMPIA AND DATED 9-11-1968

(10) FIELDNOTES FROM LEGRO & ASSOCIATES IN MOUNT VERNON, DATED 11-12-1969 AND 12-3-1969

(11) SCOTT PAPER COMPANY CORNER RECORD FOR CORNER P17, ON FILE WITH THE DNR PUBLIC LAND SURVEY OFFICE IN OLYMPIA, UNDATED

(12) SCOTT PAPER COMPANY CORNER RECORD FOR CORNER Q13, ON FILE WITH THE DNR PUBLIC LAND SURVEY OFFICE IN OLYMPIA AND DATED 6-6-1973

(13) PLAT OF LAKE TYEE I BY GWYNNE D. LEGRO, PLS 3475, RECORDED UNDER AFN 801780 AND DATED 6-4-1974

(14) PLAT OF LAKE TYEE II BY GWYNNE D. LEGRO, PLS 3475, RECORDED UNDER AFN 819944 AND DATED 7-1-1975

(15) RECORD OF SURVEY IN SECTION 21 BY ROGER N. JENSEN, PLS 12292, RECORDED UNDER AFN 831566 AND DATED 3-12-1976

(16) SHORT PLAT NO. 17-81 BY ROGER N. JENSEN, PLS 12292, RECORDED UNDER AFN 8810060031 AND DATED 10-6-1988

(17) RECORD OF SURVEY IN SECTION 22 BY FREDERIC P. PETERSEN, PLS 26303, RECORDED UNDER AFN 9009170058 AND DATED 8-17-1990

(18) RECORD OF SURVEY IN SECTION 21 BY SKAGIT SURVEYORS & ENGINEERS (JOHN L. ABENROTH, PLS 17651), RECORDED UNDER AFN 9901280026 AND DATED 1-28-1999

(19) RECORD OF SURVEY IN SECTION 21 BY SKAGIT SURVEYORS & ENGINEERS (JOHN L. ABENROTH, PLS 17651), RECORDED UNDER AFN 200209170085 AND DATED 9-17-2002

(20) RECORD OF SURVEY IN SECTION 21 BY ZITKOVICH LAND SURVEYING, STEPHEN ANTHONY ZITKOVICH, PLS 46904, RECORDED UNDER AFN 202003270103 AND DATED 3-27-2020

(21) RECORD OF SURVEY BY RADER AND LEONARD & ASSOCIATES (HAROLD P. RADER, PLS 6702) RECORDED UNDER AFN 795849 AND DATED 1-22-1974

CORNER NOTES

CORNER CODES REFER TO TOWNSHIP 36 NORTH, RANGE 8 EAST

(N13) SECTION CORNER COMMON TO SECTIONS 15, 16, 21, & 22

REPLACED BROKEN OFF CONCRETE MONUMENT WITH ALUMINUM MONUMENT

HISTORY:
1965 - SCOTT CORNER RECORDS INDICATE A WHITE STAKE AT APPROXIMATE CORNER (5)
1974 - RECORD OF SURVEY SETS A CONCRETE MONUMENT AT DOUBLE PROPORTION POSITION (21)
1990 - RECORD OF SURVEY ACCEPTS THE 1974 CONCRETE MONUMENT(17)

FIELD SEARCH:
ON 11-4-2021 WE FOUND THE BASE OF A BROKEN OFF CONCRETE MONUMENT. THE BASE WAS FIRM AND VERTICAL. WE REPLACED IT WITH AN ALUMINUM BERNTSEN MONUMENT, SET FLUSH, IN PASTURE. THIS MONUMENT IS NW OF BAKER LAKE ROAD.

PERPETUATION:
- A 32" CEDAR BEARS N5°E AT 56.39 FEET TO A STEEL NAIL THAT IS 2' UP ON THE WEST SIDE
- AN 18" CEDAR BEARS N34°E AT 141.27 FEET TO A STEEL NAIL THAT IS 1.5' UP ON THE NORTHWEST SIDE
- A 28" HEMLOCK (SE OF BAKER LAKE ROAD) BEARS S53°E AT 164.10 FEET TO A STEEL NAIL THAT IS 1.5' UP ON THE NORTHEAST SIDE
- A CENTERPUNCH MARK IN TOP CENTER OF THE SOUTHWESTERLY GATE POST ACROSS THE GR-ML ROAD BEARS S22°E AT 246.67 FEET
- A 28" COTTONWOOD BEARS S16°W AT 30.34 FEET TO A STEEL NAIL THAT IS 1.8' UP ON THE EAST SIDE

NO CARSONITE POST (PASTURE)

FIELDBOOK 7137A, PAGE 17

(N14) WEST 1/16 CORNER COMMON TO SECTIONS 15 & 22

SET ALUMINUM MONUMENT

HISTORY:
FOUND NO RECORD OF THIS CORNER BEING PREVIOUSLY SET. ON 3-7-2022, WE SET A 2-1/4" ALUMINUM BERNTSEN MONUMENT WITH 3-1/4" ALUMINUM DISC AT OUR CALCULATED POSITION, 0.3' ABOVE GRADE

PERPETUATION:
- A 10" HEMLOCK BEARS N30°E AT 5.42 FEET TO A STEEL NAIL THAT IS 1.5' UP ON THE SOUTHEAST SIDE
- A 14" HEMLOCK BEARS N70°E AT 46.85 FEET TO A STEEL NAIL THAT IS 3' UP ON THE SOUTH SIDE
- A 16" FIR BEARS S51°W AT 23.32 FEET TO A STEEL NAIL ON THE SOUTHEAST SIDE
- AN 18" HEMLOCK BEARS N31°W AT 41.32 FEET TO A STEEL NAIL THAT IS 2' UP ON THE SOUTHWEST SIDE

SET CARSONITE POST 1' NORTH

FIELDBOOK 7137A, PAGE 45

(N15) QUARTER SECTION CORNER COMMON TO SECTIONS 15 & 22

FOUND CONCRETE MONUMENT

HISTORY:
1944 - SCOTT CORNER RECORDS INDICATE AN APPROXIMATE CORNER (2)
1965 - SCOTT CORNER RECORDS INDICATE A REFERENCE MADE TO CORNER IN EARLIER FIELDBOOKS (6)
1974 - RECORD OF SURVEY FINDS AND ACCEPTS A 1" IRON PIPE IN PILE OF ROCKS AND 1960 TAG, POSITION FITS OTHER SURVEY INFORMATION, THIS SURVEY REPLACES IRON PIPE WITH CONCRETE MONUMENT WITH BRASS DISC (21)

FIELD SEARCH:
ON 10-26-2021, WE FOUND A 4"X4" CONCRETE MONUMENT WITH 2" BRASS DISC MARKED WITH CORNER DESIGNATION AND "R/L 6702" UNDER A FALLEN TREE BUT UNDISTURBED

PERPETUATION:
- A 15" HEMLOCK BEARS N71°E AT 25.91 FEET TO A STEEL NAIL THAT IS 1' UP ON THE SOUTHEAST SIDE
- A 97" CEDAR STUMP BEARS S14°E AT 112.07 FEET TO A 60d SPIKE THAT IS 3' UP ON THE EAST SIDE
- A 24" HEMLOCK BEARS S26°W AT 22.77 FEET TO A STEEL NAIL THAT IS 1.5' UP ON THE SOUTHEAST SIDE

SET CARSONITE POST 1' EAST

FIELDBOOK 7137, PAGE 27

(N17) SECTION CORNER COMMON TO SECTIONS 14, 15, 22, & 23

IN 2020, WE REPLACED A 2" PIPE WITH AN ALUMINUM BERNTSEN MONUMENT. FOR DETAILS, SEE LAND CORNER RECORD FILED UNDER SKAGIT COUNTY AFN 202101040158 AND RECORDED ON 1-4-2021

(P13) QUARTER SECTION CORNER COMMON TO SECTIONS 21 & 22

FOUND CONCRETE MONUMENT WITH BRASS CAP

HISTORY:
1968 - SCOTT CORNER RECORDS INDICATE A 1" PIPE, 3' UP AND A VERY OLD AND ROTTEN SQUARED HEMLOCK POST BUT NO BTS (7)
1974 - RECORD OF SURVEY FINDS AND ACCEPTS A 1" IRON PIPE, REPLACES IT WITH A CONCRETE MONUMENT WITH BRASS DISC (21)
1976 - RECORD OF SURVEY SHOWS A "CONC MON SET BY 6702" (15)
1988 - SHORT PLAT SHOWS "2BT AND CM" (16)
1990 - RECORD OF SURVEY SHOWS A 4"X4" CONCRETE MONUMENT (17)
1999 - RECORD OF SURVEY SHOWS A CONCRETE MONUMENT (18)
2002 - RECORD OF SURVEY SHOWS A CONCRETE MONUMENT (19)
2020 - RECORD OF SURVEY SHOWS A CONC MON WITH BRASS DISC (20)

FIELD SEARCH:
ON 10-20-2021, WE TIED AND ACCEPTED A 4"X4" CONCRETE MONUMENT WITH 2" BRASS CAP, UP 0.25' AND ORIENTED SOUTHWESTERLY. THE MONUMENT IS UPRIGHT AND LOOKS UNDISTURBED.

PERPETUATION:
- A 17" HEMLOCK BEARS S80°E AT 18.77 FEET TO A STEEL NAIL THAT IS 1' UP ON THE SOUTH SIDE
- A 110" CEDAR STUMP BEARS S18°E AT 42.83 FEET TO A STEEL NAIL THAT IS 3' UP ON THE SOUTHWEST SIDE
- A 9" HEMLOCK BEARS S42°W AT 12.03 FEET TO A STEEL NAIL THAT IS 1' UP ON THE SOUTHEAST SIDE

SET CARSONITE POST 1' NORTH

FIELDBOOK 7137, PAGE 39

(P15) CENTER QUARTER CORNER OF SECTION 22

SET ALUMINUM MONUMENT

HISTORY:
1968 - SCOTT CORNER RECORDS INDICATE A SET IRON POST (D. MOSKELAND) (9)

FIELD SEARCH:
ON 2-28-2022, WE SET A 2-1/4" ALUMINUM BERNTSEN MONUMENT WITH 3-1/4" ALUMINUM DISC AT OUR CALCULATED POSITION. A DISTURBED 2" IRON PIPE, LYING HORIZONTALLY ON THE SURFACE, IS +-25' NELY

PERPETUATION:
- A 14" FIR BEARS N24°E AT 24.38 FEET TO A STEEL NAIL THAT IS 1.2' UP ON THE SOUTHEAST SIDE
- A 10" FIR BEARS S64°E AT 12.63 FEET TO A STEEL NAIL THAT IS 1' UP ON THE SOUTHWEST SIDE
- A 12" FIR BEARS S68°W AT 16.38 FEET TO A STEEL NAIL THAT IS 1' UP ON THE NORTHWEST SIDE
- A 17" FIR BEARS N46°W AT 13.41 FEET TO A STEEL NAIL THAT IS 1' UP ON THE NORTHEAST SIDE

SET CARSONITE POST 1' NORTH

FIELDBOOK 7137A, PAGE 27

(P17) QUARTER SECTION CORNER COMMON TO SECTIONS 22 & 23

SEARCHED FOR NOT FOUND

HISTORY:
UNDATED - SCOTT CORNER RECORDS INDICATE 2 FOUND BTS AND A TRUCK AXLE. THEIR BTS DON'T MATCH THE GLO TYPE, SIZE OR CONFIGURATION(11)

FIELD SEARCH:
WE SEARCHED FOR THE AXLE REFERRED TO IN THE SCOTT PAPER COMPANY RECORDS BUT DIDN'T FIND IT. WE ALSO LOOKED FOR GLO EVIDENCE AND FOUND NONE. THE BT IN THE SCOTT RECORD DOES NOT MATCH GLO. WE CONSIDER THE CORNER LOST AND USED A CALCULATED MIDPOINT TO SUBDIVIDE THE SECTION.

(Q13) SOUTH 1/16 CORNER COMMON TO SECTIONS 21 & 22

REPLACED PIPE WITH 5/8" REBAR AND ALUMINUM CAP

HISTORY:
1973 - SCOTT CORNER RECORDS INDICATE A SET 2" IRON PIPE (12)
1988 - SHORT PLAT SHOWS A SYMBOL AT THE CALCULATED MIDPOINT (16)
2002 - RECORD OF SURVEY SHOWS A CALCULATED POSITION (19)

FIELD SEARCH:
ON 10-20-2021 WE TIED A 2" OUTSIDE DIAMETER IRON PIPE, UP 3.7'. WE ACCEPT THIS MONUMENT AS THE 1/16 CORNER AND REPLACED IT WITH A 5/8" REBAR WITH ALUMINUM CAP STAMPED WITH CORNER DESIGNATION, LS 47613 AND THE YEAR 2022

PERPETUATION:
- AN 18" FIR BEARS N55°E AT 40.07 FEET TO A STEEL NAIL THAT IS 2.5' UP ON THE NORTHWEST SIDE
- A 14" HEMLOCK BEARS S30°E AT 17.15 FEET TO A STEEL NAIL THAT IS 1.5' UP ON THE NORTHEAST SIDE

SET CARSONITE POST 1' NORTH

FIELDBOOK 7137A, PAGE 16

(R13) SECTION CORNER COMMON TO SECTIONS 21, 22, 27, & 28

REPLACED IRON PIPE WITH ALUMINUM MONUMENT

HISTORY:
1891 - GLO SURVEY SETS A POST AND MARKS 4 BTS;
14" FIR N-41-E AT 29.04'
16" FIR S-35-E AT 41.58'
16" FIR S-18-W AT 8.58'
14" FIR N-31-W AT 14.52'
1968 - SCOTT CORNER RECORDS INDICATE SETTING A 2" IRON PIPE, 5' LONG, FROM EXISTING BTS AND NOTES OLD BLAZED LINE RUNNING N-S AND E-W (8)
1969 - LEGRO FIELDNOTES FIND A 2" FLUE PIPE, OLD TAGS (STATE, 1946 BY HARRY OSBORNE AND ROY BENHAM AND SCOTT PAPER, 1968) AND 2 BTS (10)
1974 - PLAT OF LAKE TYEE I SHOWS A 2" IRON PIPE (13)
1975 - PLAT OF LAKE TYEE II SHOWS A 2" IRON PIPE (14)
1976 - RECORD OF SURVEY SHOWS A POSITION AND NOTES 4 BTS (15)
1988 - SHORT PLAT SHOWS A POSITION AND NOTES 4 BTS (16)
1999 - RECORD OF SURVEY SHOWS A CALCULATED POSITION (18)

FIELD SEARCH:
ON 11-2-2021, WE TIED AND ACCEPTED A 2" OUTSIDE DIAMETER IRON PIPE WITH WOOD PLUG, UP 4', AND REPLACED IT WITH AN ALUMINUM BERNTSEN MONUMENT STAMPED WITH CORNER DESIGNATION, LS 47613 AND THE YEAR 2021. THE NW BT IS A 26" DIAMETER FIR STUMP WITH OLD BLAZE. THE SW BT IS A LIVING 36" DIAMETER FIR TREE.

PERPETUATION:
- A 14" FIR BEARS N33°E AT 37.44 FEET TO A STEEL NAIL THAT IS 2' UP ON THE NORTHWEST SIDE
- A 32" CEDAR BEARS S85°E AT 17.84 FEET TO A STEEL NAIL THAT IS 2' UP ON THE NORTH SIDE
- A 10" FIR BEARS S45°E AT 33.71 FEET TO A STEEL NAIL THAT IS 1' UP ON THE NORTHEAST SIDE
- A 36" FIR TREE (GLO BT) BEARS S15°W AT 8.58 FEET TO A STEEL NAIL THAT IS 2' UP ON THE EAST SIDE
- A 14" FIR BEARS N36°W AT 25.79 FEET TO A STEEL NAIL THAT IS 2' UP ON THE SOUTHWEST SIDE
- A 26" FIR STUMP WITH OLD BLAZE BEARS N31°W AT 14.5' TO CENTER

FIELDBOOK 7137, PAGE 24

(R15) QUARTER SECTION CORNER COMMON TO SECTIONS 15 & 22

FOUND CONCRETE MONUMENT

HISTORY:
1891 - GLO SURVEY SET A POST AND MARKED 2 BTS:
8" FIR S-50-W AT 9.24'
12" FIR N-76-E AT 16.5'
1964 - SCOTT CORNER RECORDS INDICATE A SCRIBED CEDAR POST IN A 2-1/2" IRON PIPE AND SEVERAL CRUISERS MARKS BUT NO BTS (4)
1969 - LEGRO FIELDNOTES INDICATE REPLACING AN EXISTING 2" FLUE PIPE WITH "COUNTY TYPE CONC MON WITH BRASS DISC". THEY FOUND STATE TAGS FROM 1946 (HARRY OSBORNE AND ROY BENHAM) AND 1951 (TOM ANDERSON AND JIM FUTTRELLE) AND THE NE BT (10)
1975 - PLAT OF LAKE TYEE II SHOWS A "MON" (14)

FIELD SEARCH:
ON 11-3-2021, WE FOUND A LEANING 4"X4" CONCRETE MONUMENT WITH 3-1/2" BRASS DISC. WE PLUMBED THE MONUMENT BACK UP OVER ITS BASE AND BUILT A MOUND OF STONE AROUND IT. THE MONUMENT NOW SITS 0.5' UP FROM THE NEW MOUND OF STONE

PERPETUATION:
- A 10" FIR BEARS N30°E AT 5.81 FEET TO A STEEL NAIL THAT IS 1.2' UP ON THE SOUTHEAST SIDE
- THE ORIGINAL LOCATION OF A DOWNED 8" HEMLOCK WITH VISIBLE SCRIBING (BT) BEARS N80°E AT 16.6'
- A 10" FIR BEARS S33°E AT 23.17 FEET TO A STEEL NAIL THAT IS 1.7' UP ON THE SOUTHWEST SIDE
- 6" ROTTED STUMP REMAINS (POSSIBLE BT) BEAR S53°W AT 7.0'
- A 16" FIR BEARS S53°W AT 15.25 FEET TO A STEEL NAIL THAT IS 1' UP ON THE SOUTHEAST SIDE
- A 13" FIR BEARS N28°W AT 22.37 FEET TO A STEEL NAIL THAT IS 1.2' UP ON THE SOUTHWEST SIDE

SET CARSONITE POST 1' NORTH

FIELDBOOK 7137, PAGE 26

(R17) SECTION CORNER COMMON TO SECTIONS 22, 23, 26, & 27

IN 2020, WE REPLACED A 1-1/2" IRON PIPE WITH AN ALUMINUM BERNTSEN MONUMENT. FOR DETAILS, SEE LAND CORNER RECORD FILED UNDER SKAGIT COUNTY AFN 202101040159 AND RECORDED ON 1-4-2021

BRIAN JAMES WILLIAMS — STATE OF WASHINGTON — 47613 — REGISTERED PROFESSIONAL LAND SURVEYOR — 5-17-22

A SURVEY IN SECTION 22,
TOWNSHIP 36 NORTH, RANGE 8 EAST, W.M.,
SKAGIT COUNTY

STATE OF WASHINGTON
DEPARTMENT OF NATURAL RESOURCES

LAND SURVEY SECTION - P.O. BOX 47030
OLYMPIA, WASHINGTON 98504-7030 (360) 902-1206

"FANGORN" SURVEY

FIELD CREW: B. WILLIAMS, P.L.S.
B. SIVRET
R. THOMAS, L.S.I.T.

FIELD BOOK: 7137 & 7137A 5/5/2022

FINAL MAP NUMBER: 2230

SHEET 2 OF 2

UNOFFICIAL DOCUMENT