

# Sauk River & Concrete-Sauk Valley Road Bank Stabilization

## Concrete-Sauk Valley Road Stabilization Project

Funding Sources:


**Skagit County**

**\$200,000**

### Project Funding:

Project costs shown are reflective of anticipated costs of the preliminary work necessary to identify a variety of viable alternatives. Future funding opportunities will be explored in conjunction with the available alternatives to best serve the people of Skagit County.

### Concrete-Sauk Valley Road Stabilization

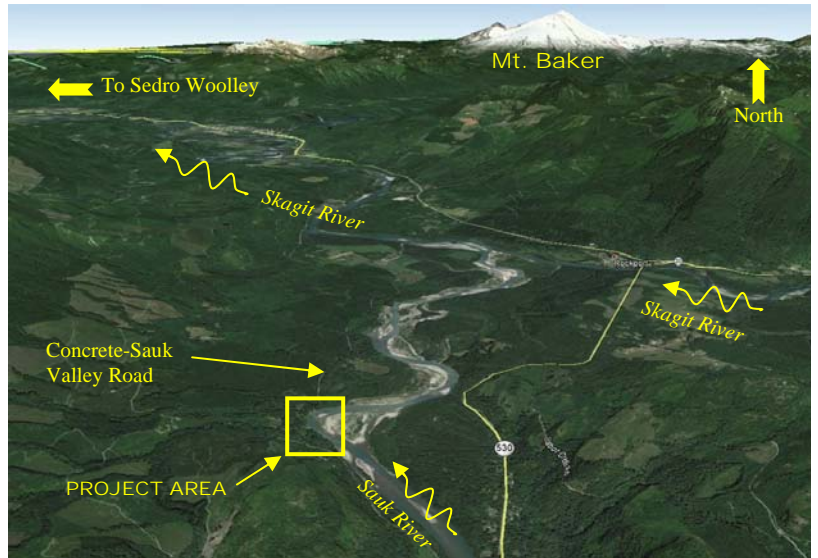

### Project Narrative:

Since 2000, the Sauk River has migrated over 1,000 feet towards Concrete-Sauk Valley Road. This channel migration has resulted in the erosion of a high bank that has encroached into the road base; requiring a full lane closure of the road. In addition, the river migration has contributed to stream bed and material loss (head cutting) on two streams in the project area resulting in perched culverts, and creating fish barriers to known migration streams. The project is located at milepost 13.2 on Concrete–Sauk Valley Road, southeast of the Town of Concrete in Skagit County, Washington, SE corner of Section 11, Township 34N, Range 9E.

In the summer of 2017, Skagit County advertised for statements of qualifications from engineering firms interested in providing professional services for a study to identify and evaluate restoration alternatives that will restore and protect the roadway as well as resolve the perched culverts and related fish passage concerns within the project area and provide preliminary plans. Currently, Skagit County is in negotiations with an engineering firm to provide these services.

### SKAGIT COUNTY



### Sauk River: Adjacent to Concrete-Sauk Valley Rd

