

---

**AMENDMENT NUMBER 1 TO THE BID DOCUMENTS**Amendment Date: **June 11, 2025****SKAGIT COUNTY COURTHOUSE ANNEX TENANT IMPROVEMENT PROJECT**

**A. This Amendment shall be considered part of the bid documents for the above-mentioned project as though it had been issued at the same time and shall be incorporated integrally therewith. Where provisions of the following supplementary data differ from those of the original bid documents, this Amendment shall govern and take precedence. BIDDERS MUST SIGN THE AMENDMENT AND SUBMIT IT WITH THEIR BIDS.**

**B. Bidders are hereby notified that they shall make any necessary adjustments in their estimates as a result of this Amendment. It will be construed that each bidder's proposal is submitted with full knowledge of all modifications and supplemental data specified herein.**

BIDDER MUST ACKNOWLEDGE THIS AMENDMENT BY SIGNING BELOW  
AND INCLUDING THE SIGNED PAGE WITH THE BID SUBMITTAL:

Company Name \_\_\_\_\_

Contact Person \_\_\_\_\_

Signature \_\_\_\_\_

Date \_\_\_\_\_

---

Except as described below, the original bid document remains unchanged. The bid documents are modified and/or clarified, as follows:

1. **Bid is for a Fixed Price Contract:** Paragraph 2 in Vendor Services Agreement states "not to exceed \$ \_\_\_\_\_," which is used for internal budgeting and auditing purposes. The contract compensation section will list the fixed price plus tax.
2. **Bid Bond is NOT required** for this small works project.
3. **Builder's Risk insurance is not required** Contractor shall provide proof of insurance for general comprehensive liability in the amount of \$1,000,000.
4. **Door Hardware** Contractor will provide all door hardware that is BEST mini key core compatible and similar color to existing onsite hardware. Contractor will provide construction cores.
5. **Any Mastic may be removed with chemicals** as long as negative ventilation is established via applicable windows & doors in project area.
6. **Contractor will have 24/7 access to the building** County request that materials be moved primarily after hours for larger items. All County furniture will be removed from entire project location. Contractor will receive keys to access facility.

- 
7. **Bathroom(s)** In the Male and Female bathroom remove the FRB and replace with new material with similar color with 6" black cove base. Bathrooms will use existing fixtures.
  8. **Lighting specifications** See attached cut sheet.
  9. **Electrical specification** Any new circuits can be added to existing electrical panel supplying power to the project location.
  10. **No ACM or Lead in Project Location** Section 00.31.00, Part.1 General, Reports 1.01.
  11. **No Fire Alarm Work in Space** Correct section A.2.0 Fire Alarm Modifications not A5.
    - If you need additional details or instructions, please contact Eric Peterson at [epetersn@co.skagit.wa.us](mailto:epetersn@co.skagit.wa.us) or phone 360-416-1176.



# Day-Brite


## CFI

by Signify

Recessed

FluxPanel LED gen 2

2x4 at up to 8000 lumens

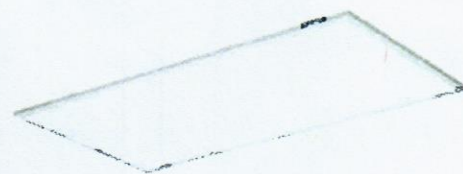

Day-Brite/CFI FluxPanel LED gen 2 recessed is a highly versatile luminaire designed to provide smooth lighting gradient on the lens surface and ease of installation. Available for use in recessed, suspended, and surface mount orientation, FluxPanel gen 2 is ideal for general lighting applications such as open office, schools, healthcare, clean rooms, and retail.

Project: \_\_\_\_\_  
Location: \_\_\_\_\_  
Cat. No: \_\_\_\_\_  
Type: \_\_\_\_\_  
Qty: \_\_\_\_\_  
Notes: \_\_\_\_\_

### Ordering guide

Standard configurations available with all choices, unless otherwise noted.  
Base configurations selections indicated by blue.

Example: 2FPZ43L840-4-ADS-UNV-DIM-EM10

Family	Lumens (nominal delivered)	Color (CRI / CCT)	Length	Diffuser	Voltage	Driver	Options <sup>2</sup>
<b>2FPZ</b>			<b>4</b>				
2FPZ 2ft FluxPanel gen 2	<b>Base config<sup>4</sup></b> <b>42B</b> 4200lm  <b>Standard configs</b> <b>15L</b> 1500lm <b>30L</b> 3000lm <b>38L</b> 3800lm <b>43L</b> 4300lm <b>48L</b> 4800lm <b>54L</b> 5400lm <b>60L</b> 6000lm <b>74L</b> 7400lm <b>80L</b> 8000lm  Other lumen packages may be ordered in increments of 100 lumens from 1500lm to 8000lm	<b>835</b> 80 CRI, 3500K <b>840</b> 80 CRI, 4000K <b>850</b> 80 CRI, 5000K	<b>4</b> 4ft	<b>DS</b> Diffuse (smooth) <b>ADS</b> Acrylic Diffuse (smooth) <b>A12</b> Diffuse (Prismatic)	<b>UNV</b> Universal Voltage, 120-277V <b>120<sup>5</sup></b> 120V <b>277</b> 277V <b>347</b> 347V	<b>DIM<sup>1</sup></b> 0-10V dimming <b>SDIM<sup>5</sup></b> Step dimming to 30% input power <b>XDIM<sup>5,6</sup></b> MarkX phase dimming	<b>F1</b> 3/8" flex, 18 gauge 6'; 3 leads include hot, neutral, ground <b>F2</b> 3/8" flex, 18 gauge 6'; 4 leads include 2 hots, neutral, ground <b>F1/D<sup>8</sup></b> 3/8" twin flex, 18 gauge 6' for dimmable luminaires; <b>Flex 1:</b> 3 leads include hot, neutral, ground <b>Flex 2:</b> 2 leads, Dim +/Dim - <b>F2/5W<sup>9</sup></b> 3/8" single flex, 18ga. 6' for dimmable luminaires; 5 leads include hot, neutral, ground, Dim + / Dim - <b>F2/6W<sup>9</sup></b> 3/8" single flex, 18ga. 6' for dimmable & EM luminaires; 6 leads include 2 hot, neutral, ground, Dim + / Dim - <b>GLR</b> Fusing, fast blow <b>DSC</b> Quick driver disconnect <b>CHIC</b> Chicago Plenum rated <b>BAC<sup>10</sup></b> Meets the requirements of the Buy American Act of 1933 (BAA) <b>ER100<sup>4,5,11,12</sup></b> UL924 listed sensor bypass relay, factory installed between driver & sensor <b>EM10<sup>5,9,15</sup></b> Bodine 10W battery pack <b>EM06<sup>5,9,15</sup></b> Bodine 6W battery pack <b>SWZCSR<sup>1,4,7,8,10</sup></b> Remote Interact wireless sensor. with integral daylight & occupancy sensing, advanced grouping with dwell time <b>SWZCS<sup>1,4,8,10,15</sup></b> Interact wireless sensor. with integral daylight & occupancy sensing, advanced grouping with dwell time <b>RADIO<sup>1,4,5,7,9</sup></b> Interact RF sensor for wireless connectivity only, no sensing

- 1 Integral control options dimmable to 1% via wireless wall switch. Non-controls options are 0-10V dimmable to 1% for Standard configurations and 5% for Base configurations.
- 2 All options only available with Standard configurations.
- 3 XDIM is 120V only.
- 4 Specify DIM driver option only.
- 5 Not available with 347V option.
- 6 XDIM max lumen output 50L: <45L requires ELV dimmer; >45L requires Triac dimmer.
- 7 Not available with surface or suspended accessories.
- 8 Flex with dimming not available with Interact sensors.
- 9 Emergency and Interact options not clean room certified, nor NSF listed.
- 10 Must order IRT9015 Interact commissioning remote with each system order.
- 11 Must be installed in conjunction with a UL1008 device.
- 12 Must be ordered with an integral controls option.
- 13 Failure to properly select the "BAC" suffix could result in you receiving product that is not BAA compliant product with no recourse for an RMA or refund. This BAC designation hereunder does not address (i) the applicability of, or availability of a waiver under, the Trade Agreements Act, or (ii) the "Buy America" domestic content requirements imposed on states, localities, and other non-federal entities as a condition of receiving funds administered by the Department of Transportation or other federal agencies.
- 14 Consult Signify to confirm whether specific accessories are BAA-compliant.
- 15 Specify ADS diffuser for integrated sensor or EM test switch.

### Accessories<sup>14</sup> (order separately)

- **FMA24:** 2'x4' "F" mounting frame for NEMA "F" mounting
- **FSK24:** 2'x4' surface mount field installation kit (factory welded seams)
- **FSF24:** 2'x4' surface mount field assembly kit (field assembled)
- **FPZCH48-1D-SC-UNV:** adjustable cable hanger kit with straight white 18/5 cord for dimming (two-1 powered, 1 non-powered).
- **FPZCH48-1D-SC-347:** adjustable cable hanger kit with straight white 18/5 cord for dimming (two-1 powered, 1 non-powered).
- **IRT9015:** handheld remote for grouping and configuration (at least one remote required for any SWZCS installation).

Not all product variations listed on this page are DLC qualified. To ensure that a specific model is qualified, visit [www.designlights.org/search](http://www.designlights.org/search)



interact  
ready.